


PATrIA

AIRCRAFT TOW TRACTORS

PTD 60 - 80 T-2

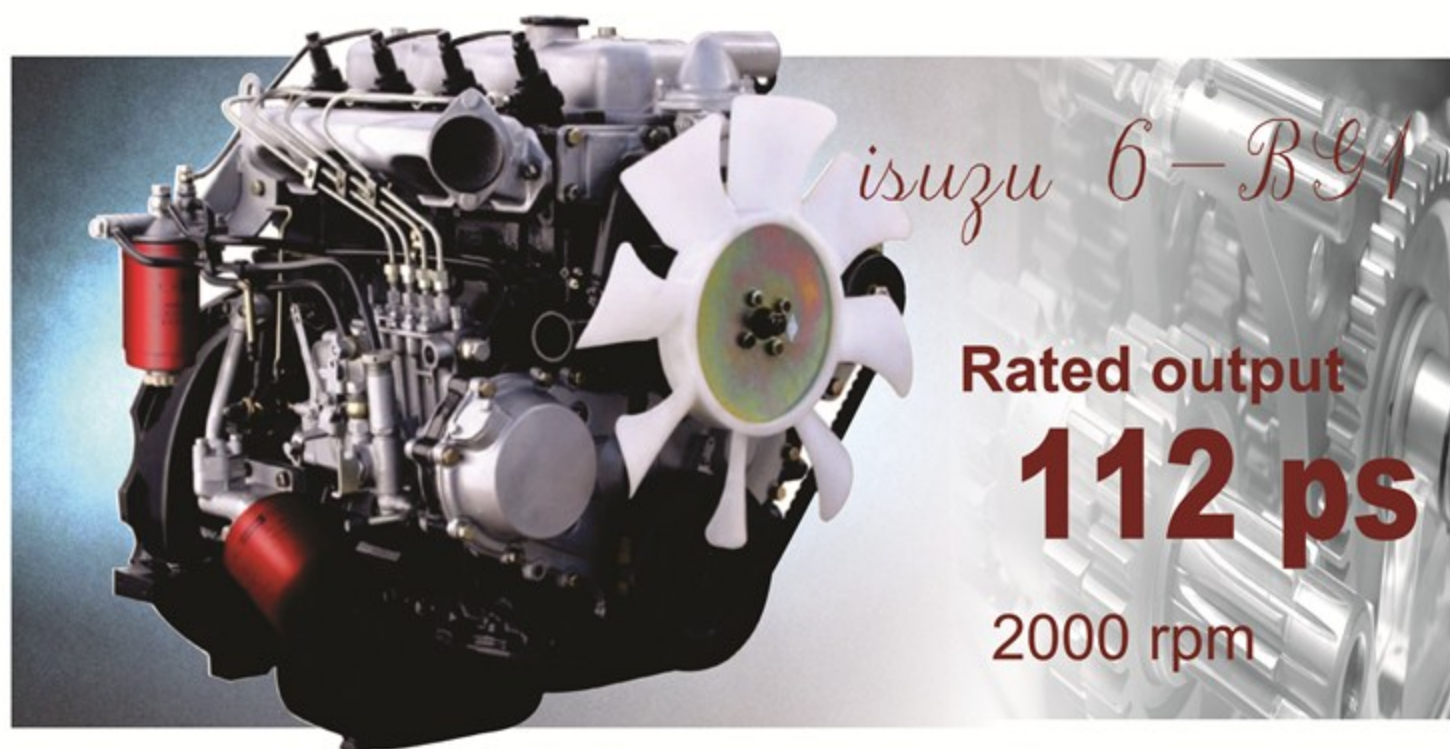

The highly selected engine are high performance providing smooth yet powerful operation to deliver the task

Reliable, Light-Touch Operating System



Compact Instrument Panel

The size and shape of panel are optimally designed to monitor unit at a glance and improve the forward visibility.

Compact Handle Lever

Combination of forward and reverse lever provides quick and easy change of aircraft tow tractor direction.

TOWING TRACTORS SPECIFICATION

| | | | | | | |
|------------------|----|---|--------------------------------------|---------|---------------|---------------|
| SPECIFICATION | 1 | Manufacturer | | | Patria | Patria |
| | 2 | Model | Manufacturer's designation | | PTD 60T-2 | PTD 80T-2 |
| | 3 | Maximum Drawbar Pull | | kg | 6000 | 8000 |
| | 4 | Power Type | | | Diesel | Diesel |
| | 5 | Tire Type | Solid, Pneumatic | | Pneumatic | Pneumatic |
| | 6 | Operator Cab Type | Driver Standing, Sitting | | Sitting | Sitting |
| | 7 | Wheels (* = driven) | Number, Front/Rear | | 2 / 4* | 2 / 4* |
| DIMENSION | 8 | Overall Dimensions | Height | mm | 1870 | 1870 |
| | 9 | | Length | mm | 4440 | 4440 |
| | 10 | | Width | mm | 1950 | 1950 |
| | 11 | Turning Radius | Outside | mm | 5700 | 5700 |
| | 12 | Underclearance | | mm | 200 | 200 |
| | 13 | Centerheight of Drawbar | | mm | 400 | 400 |
| PERFORMANCE | 14 | Speed | Travel | | | |
| | | | Forward 1 | km/h | 26 | 26 |
| | | | Forward 2 | km/h | 30 | 30 |
| | | | Reverse 1 | km/h | 26 | 26 |
| | | | Reverse 2 | km/h | 30 | 30 |
| | 15 | Towed weight at dry even concrete surface | with one trailer | kg | | |
| | | | with a train of two or more trailers | kg | | |
| | 16 | Max., Drawbar Pull | Loaded/Unloaded | N | 60000 | 80000 |
| | 17 | Gradeability | At Forward 1 | % | 35 | 35 |
| | | | At Reverse | % | 19 | 19 |
| | | | | | | |
| WEIGHT | 18 | Service Weight | | kg | 7970 | 10000 |
| | 19 | Axle Loading | Front | kg | 2200 | 2700 |
| | | | Rear | kg | 5700 | 8000 |
| CHASSIS & WHEELS | 20 | Tire Size | Front | | 7.50-16-14PR | 7.50-16-14PR |
| | 21 | | Rear | | 8.25-15-14PR | 8.25-15-14PR |
| | 22 | Wheelbase | | mm | 2260 | 2260 |
| | 23 | Tread | Front | mm | 1380 | 1380 |
| | 24 | | Rear | mm | 1470 | 1470 |
| | 25 | Brakes | Service | | Hydraulic | Hydraulic |
| | 26 | | Parking | | Mechanic/Hand | Mechanic/Hand |
| | 27 | Dampering | | | Yes | Yes |
| | 28 | Steering | Type | | Power Steer | Power Steer |
| DRIVE LINE | 29 | Manufacturer | | | Isuzu | Isuzu |
| | 30 | Model | | | 6BG1 | 6BG1+Turbo |
| | 31 | Rated Output (JIS Rating) | | ps/rpm | 112/2000 | 112/2000 |
| | 32 | Maximum Torque (JIS Rating) | | kgm/rpm | 1400 / 1600 | 1400 / 1600 |
| | 33 | Number of Cylinders/Displacement | | cc | 6/6494 | 6/6494 |

PATrIA

Developed by :

PT UNITED TRACTORS PANDU ENGINEERING

http : //www.patria-ute.com

e-mail : marketing@patria-ute.com

Manufactured & Distributed by :



PT CYBERINDO SINARBHAKTI

Head Office : Jl. Raya Kampung Melayu No.38

RT.01 RW.01 Teluk Naga

Tangerang 15510 - Indonesia

Phones/Fax : +62-21 55913638 / +62-21 55915725

Email : cyberonline@cbn.net.id

Website : www.cyberindogse.com

Specification are subject to change without prior notice

